

Optional piping configuration, to facilitate removal of debris from pit.

Notes:

1. Closure of major slab openings is important.
2. Fan may also be mounted at grade outdoors.
3. Air filter must be accessible for changing or cleaning.
4. Houses built on well-drained gravel soils (suitable for sub-slab pressurization) will not always have sub-slab aggregate as shown.

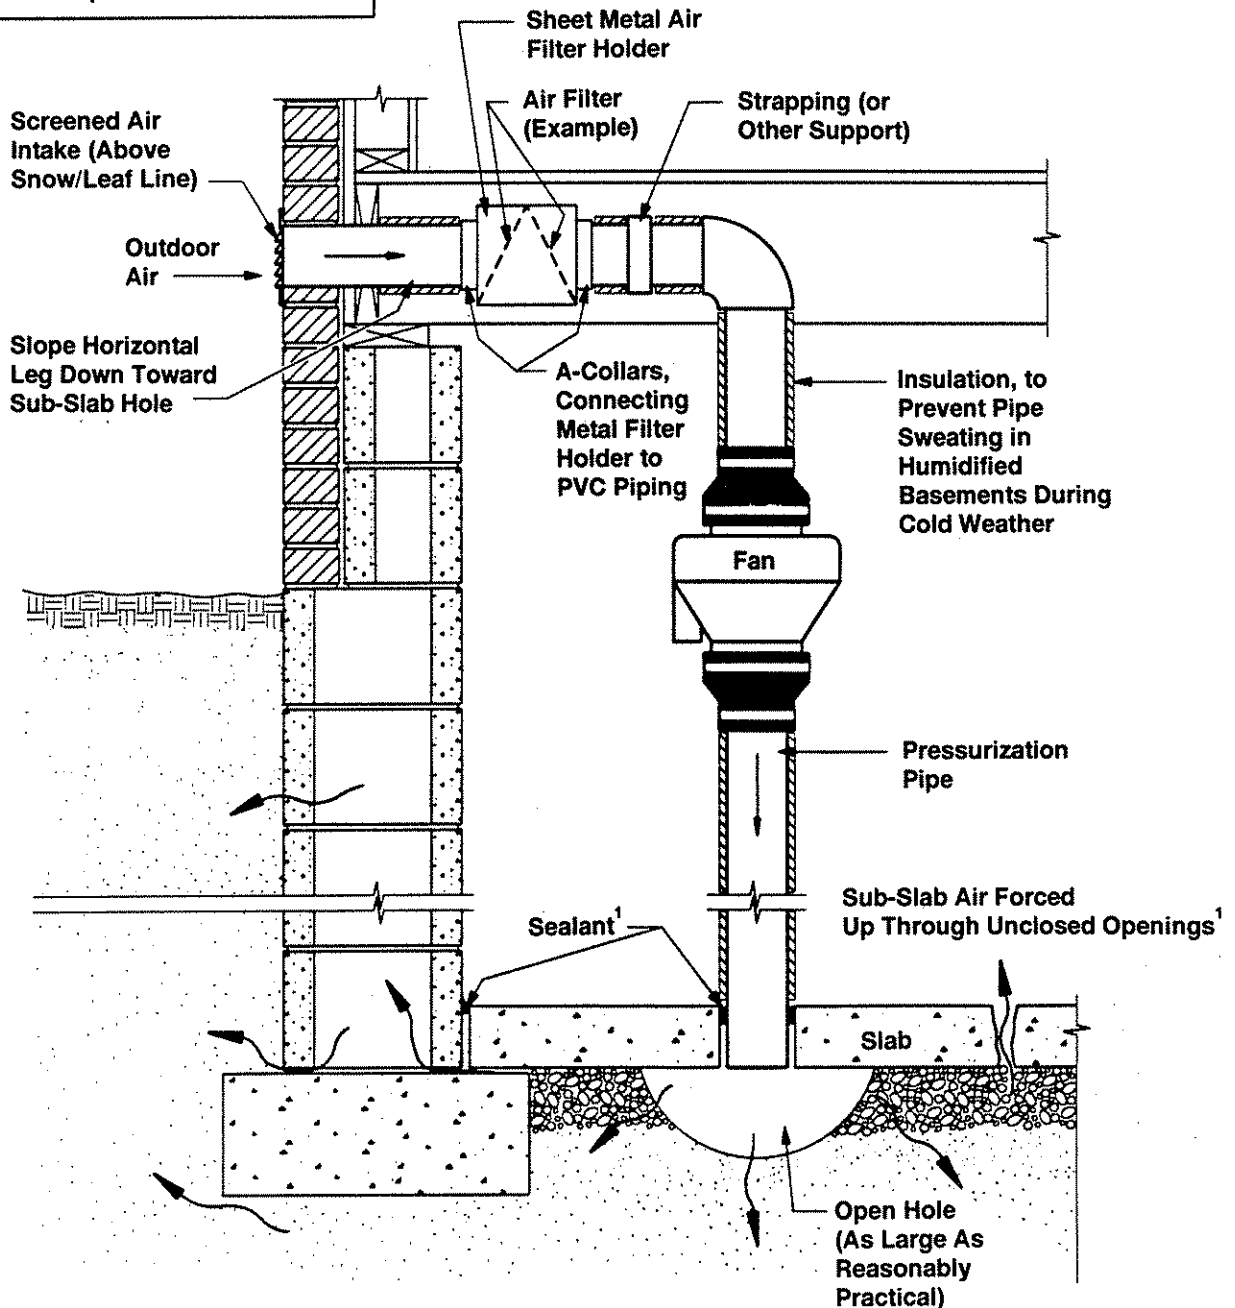


Figure 40. Sub-slab pressurization using one typical approach.